

VETROTECH SAINT-GOBAIN

SGG PYROSWISS® MARINE A0

Where can it be used?

SGG PYROSWISS MARINE A0 is a fire-resistant safety glass in the B0 and A0 class. This thermal, extra-toughened glass with its increased mechanical effects is highly suitable for external application in the hull and the superstructure.

How well does it withstand fire?

In the event of a fire, SGG PYROSWISS MARINE A0 forms an effective barrier against smoke, flames and toxic gases for up to 60 minutes. The glass remains transparent and completely intact when exposed to fire, allowing the possibility for safe evacuation. Potential sources of danger remain visible to safety workers and crew.

Photo: Mike Louagie




SGG PYROSWISS MARINE, A MULTI-PURPOSE SINGLE PANE.

SGG PYROSWISS® MARINE A0

30 to 60 minutes of fire-resistance in clear safety glass. ISO 614.

This glass combines the beautiful optical quality of float glass with a fire-resistance of 30 to 60 minutes.

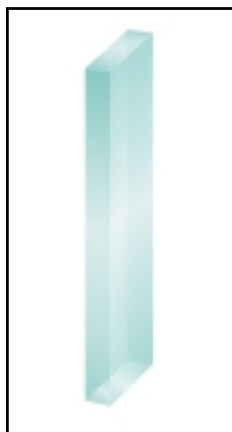

SGG PYROSWISS MARINE,
a multi-purpose single pane,
fire-resistant for 60 minutes.

Many possibilities

SGG PYROSWISS MARINE A0 is available in various types and offers many possibilities:

- product type A0
- clear glass
- sandblasted glass
- clear or matt glass
- thicknesses: 6-25 mm
- single or insulating glazing
- can also be combined with e.g. reflective coating and thermal insulation glazing.