

ONE-WAY LOCK



SPECIFICATIONS

Function

Mechanical

Dimension in mm

(Length × Width × Height)

77 × 72 × 45

Fixation

Gluing

Standard finishing


RAL 9005 powder coating

DESCRIPTION

The One-way lock is a lock with a half euro profile cylinder. The lock pin with a cemented core is controlled with supplied keys. It is able to lock a fire door in the top or side frame or in the floor. No notches are required in the door leaf because the lock is glued on the surface of the door. The black finish makes the one-way lock a valuable option that fits the door concept. Single side accessibility to the lock and the associated risks in case of fire shall be noted regarding its application.

FEATURES

- + Suitable to secure an environment from one side
- + Appropriate for end-of-day locking purposes in small offices or permanent locking of a door leaf
- + Can be glued on top, middle and bottom of the door leaf
- + Applicable on single door and double doors
- + More than one lock can be used
- + Custom colors of housing on request
- + Lock will be delivered with the accessories and needs to be bonded on site
- + Prior installation of lock in factory is on request

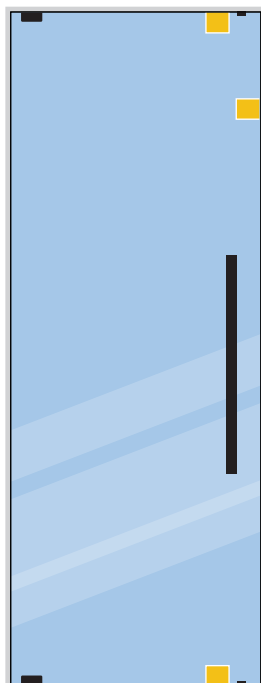

FRONT



SIDE