

LUNAX® PORTA NFR


Non-fire resistant frameless all glass door for interior application

DOOR

Specifications

Glass type
CLIMALIT IGU

Door types



AVAILABLE FEATURES



- + Various door configurations
- + Extra transparency
- + Standard color of fittings: RAL 9005 (wide range of colors on handles/fittings can be realized)
- + Edge and screen printing (surface and/or edges)
- + Vision control and decorative film application

Contact us to personalize your solution to meet your project requirements.

Dimensions

Maximum door leaf dimensions (WxH)*

1150 x 2660 mm


Minimum door leaf width

450 mm (550 mm by application of LUNAX electrical lock EL404)

Maximum door leaf weight

Thickness: 20 mm - Maximum door leaf weight of 100 kg

Configurations

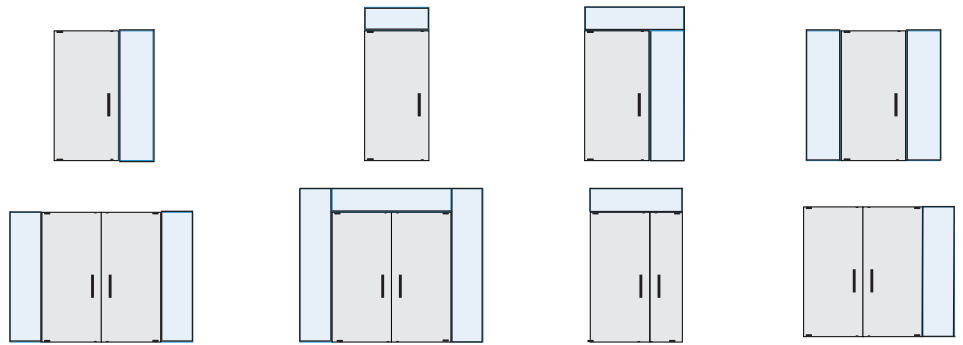

Mode of operation

Single or double action door

Frames / Supporting constructions

Any (mechanical stability should be taken into consideration)

Floor springs

Any floor spring with/without hold open function upon request

Handles

LUNAX Model K, S or T (3 different models, each available in 3 different lengths) and custom shape handles according to request. The handles can be placed on the desired height.

Locks / Accessories

Electrical Lock EL404, LUNAX one-way lock, LUNAX magnetic lock SEWOSY EF300 CTC, LUNAX electromagnetic hold-open Dorma EM-series, LUNAX door stop

Fire resistance

No fire resistance classification

* The door leaf height is 10mm bigger than the glass height

vetrotech.com

Product characteristics are subject to change without notice and may vary depending on manufacturing size and composition. Available options are dependent on product type and application. Contact your Vetrotech representative for further support.