


# VETROGARD ATTACK P6B

Attack resistant security glass

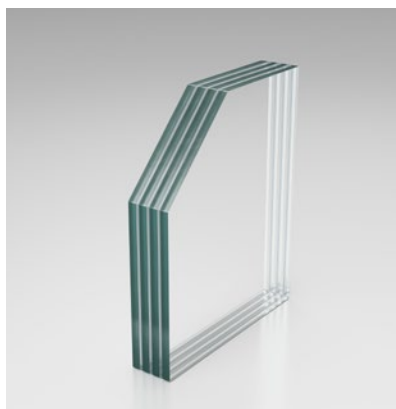

Sample configuration only - Non contractual picture

## Classification



### Attack

Attack resistant glazing intended to hold back forced entry for a specific time.

## Technical Specifications

### Resistance class

Impact resistance

Application conditions

ID-No.

Dimensional tolerances (width/height)

### P6B, glass attack (EN 356)

1(B)1 (EN 12600)

For more information and assistance, please contact your local Vetrotech agent and refer to the relevant "Quality and Application Guidelines".  
Always verify the side of attack.

SP615

≤1000 mm: -1 / +2 mm | ≤2000 mm: -1 / +2 mm | >2000 mm: -1 / +3 mm

### Product / CE / DoP-Code

Nominal thickness

Maximum glass size

Thickness tolerance

Weight

Sound reduction  $R_w$  (EN 140-3)

Light transmission (EN 410)

Light reflection  $p_L$  ext./int. (EN 410)

$U_g$  value,  $W/m^2 \cdot K$  (EN 673)

$g$  value (EN 410)

### PLANICLEAR

15 mm

9.6 m<sup>2</sup> (2400 mm / 4000 mm)

± 1 mm

33 kg/m<sup>2</sup>

37dB

86%

8% / 8%

5.1

0.72

### DIAMANT

15 mm

9.6 m<sup>2</sup> (2400 mm / 4000 mm)

± 1 mm

33 kg/m<sup>2</sup>

37dB

88%

8% / 8%

5.1

0.76

### Additional Informations

DoP: Declaration of Performance - available upon request from your sales office.

NPD: No Performance Determined