


VETROGARD PRO BR6-NS / P8B

Attack and bullet resistant security glass for interior and exterior application

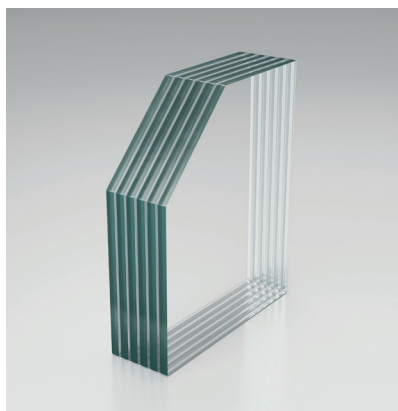

Sample configuration only - Non contractual picture

Classification



Attack

Attack resistant glazing intended to hold back forced entry for a specific time.



Bullet

Bullet resistant glazing offering an effective resistance against specific weapons and ammunition types. A distinction is made between splintering (S) and non-splintering glass (NS).

Technical Specifications

Resistance class

Resistance class
Impact resistance
Application conditions
Certificate of constancy of performance
ID-No.
Dimensional tolerances (width/height)

BR6-NS (no splinters, EN 1063)

P8B (EN 356)
1(B)1 (EN 12600)
See Vetrotech Quality and Application Guidelines.
0336-CPR-89205280-C - AVCP System 1
HN 665-NS
≤1000 mm: -1 / +3 mm ≤2000 mm: -1 / +4 mm >2000 mm: -1 / +5 mm

Product / CE / DoP-Code

Nominal thickness
Maximum glass size
Thickness tolerance
Weight
Sound reduction Rw (EN 140-3)
Light transmission (EN 410)
Light reflection pL ext./int. (EN 410)
U value, W/m ² K (EN 673)
g value (EN 410)
Energy transmission tE (EN 410)

PLANICLEAR

65 mm
2200 x 4000 mm
± 3 mm
158 kg/m ²
52 dB
74%
7% / 7%
4.0
0.55
42%

DIAMANT

65 mm
2200 x 4000 mm
± 3 mm
158 kg/m ²
52 dB
82%
8% / 8%
4.0
0.66
57%

Additional Informations

Shapes: dimensional tolerances may vary +1 mm.

DoP: Declaration of Performance - available upon request from your sales office.

NPD: No Performance Determined