



# ENVIRONMENTAL PRODUCT DECLARATION

*In accordance with EN 15804 and ISO 14025*

## PYROSWISS

PYROSWISS 6mm  
PYROSWISS 8mm  
PYROSWISS 10mm  
PYROSWISS 12mm  
PYROSWISS STADIP 66.2  
PYROSWISS STADIP 64.2

**E30 / E60 (Integrity): Fire resistant glazing with tested integrity for 30 or 60 minutes**

Programme : The international EPD®System, [www.environdec.com](http://www.environdec.com)  
Programme operator: EPD International AB  
Publication date: 2019-12-17  
Valid until: 2024-12-17



**EPD®**

EPD Registration number  
S-P-01708

**vetrotech**  
SAINT-GOBAIN

# Table of content

|   |    |
|---|----|
| Table of content.....   | 2  |
| Programme information .....                                       | 3  |
| Product description.....  | 4  |
| Product description and description of use .....                  | 4  |
| Declaration of the main product components and/or materials ..... | 6  |
| LCA calculation information .....                                 | 7  |
| Life cycle stages .....   | 8  |
| Product stage, A1-A3 .....  | 10 |
| LCA results .....   | 12 |
| PYROSWISS 6 mm .....  | 13 |
| PYROSWISS 8 mm .....  | 17 |
| PYROSWISS 10 mm .....   | 21 |
| PYROSWISS 12 mm .....   | 25 |
| PYROSWISS STADIP 66.2 .....                                       | 29 |
| PYROSWISS STADIP 64.2 .....                                       | 33 |
| LCA results interpretation .....                                  | 37 |
| Health characteristics.....                                       | 37 |
| Additional Environmental Information .....                        | 38 |
| Disposal considerations .....                                     | 38 |
| Saint-Gobain’s environmental policy .....                         | 38 |
| Our products’ contribution to Sustainable Buildings .....         | 38 |
| References .....  | 40 |

## Programme information

|  |   |
|--|---|
| <b>Programme</b>   | The International EPD® System<br>EPD International AB, Box 210 60, SE-100 31 Stockholm, Sweden<br>More information at <a href="http://www.environdec.com">www.environdec.com</a>                                  |
| <b>EPD® registration number</b>  | S-P-01708   |
| <b>Programme category rules (PCR)</b>  | EN 15804 as the core PCR and PCR for construction products and construction services issued by the International EPD System (PCR 2012:01 Construction products and construction services, version 2.3 2018-11-15) |
| <b>CPC Classification</b>  | 37115 “safety glass”  |
| <b>PCR review was conducted by</b>   | The Technical Committee of the International EPD® System. Contact via <a href="mailto:info@environdec.com">info@environdec.com</a>  |
| <b>Owner of the declaration</b>  | VETROTECH SAINT-GOBAIN INTERNATIONAL AG<br>Bernstrasse 43, 3175 Flamatt, Switzerland<br>Maureen Bernard. Email: <a href="mailto:maureen.bernard@saint-gobain.com">maureen.bernard@saint-gobain.com</a>            |
| <b>Manufacturer</b>  | VETROTECH Saint-Gobain France, Condren  |
| <b>Independent third-party verification of the declaration and data, according to ISO 14025:2006</b> | <input type="checkbox"/> EPD process certification <input checked="" type="checkbox"/> EPD verification   |
| <b>EPD® prepared by</b>  | Elodie Ducourthial (Saint-Gobain Glass)<br>Contact: <a href="mailto:Elodie.ducourthial@saint-gobain.com">Elodie.ducourthial@saint-gobain.com</a>  |
| <b>Third party verifier</b>  | Elena Antuña-Bernardo, EA consultant<br><a href="mailto:Elena@eaconsultant.eu">Elena@eaconsultant.eu</a>  |
| <b>Approved by</b>   | The International EPD® System   |
| <b>Procedure for follow-up of data during EPD validity involves third party verifier</b>             | <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No   |
| <b>Declaration issued</b>  | 2019-12-17  |
| <b>Valid until</b>   | 2024-12-17  |

The EPD owner has the sole ownership, liability, and responsibility for the EPD. EPDs within the same product category but from different programs may not be comparable. EPDs of construction products may not be comparable if they do not comply with EN 15804.

An EPD should provide current information and may be updated if conditions change. The stated validity is, therefore, subject to the continued registration and publication at [www.environdec.com](http://www.environdec.com).

Reading note: In this document, the thousand separator and the decimal mark follow the International System English version, i.e 1 234.56

# Product description

## Product description and description of use

The Environmental Product Declaration (EPD) describes the environmental impacts of 1m<sup>2</sup> of PYROSWISS, which is a fire resistant laminated glass.

### SPECIFIC MAKE-UPS DESCRIBED IN THIS EPD

PYROSWISS is the original clear, fire-resistant glass technology of Vetrotech, with full safety glass characteristics. It is a single highly tempered safety glass in conformance with either EN12150 or EN14179 or ESG-H according to German regulation. The special production process allows the products to withstand the high thermal stress caused by room fires from either side while keeping the affected area hermetically sealed. PYROSWISS offers two-sided E-class fire-resistance in conformance with EN 13501-2. Free from UV sensitive interlayers or embedded wires, it provides very high transparency and light transmission offering freedom of design in interior and exterior applications.

By adding a laminated safety glass including a PVB layer, fall-through protection in the event of breakage of the PYROSWISS unit can be included as an option.

PYROSWISS IGU can also be used as a fire resistant and Insulating Glass Unit for internal or external applications. This type of glass is described in a separate EPD.

In this Environmental Product Declaration, one square meter of 6 different glazing configurations will be analyzed:

1. PYROSWISS 6mm
2. PYROSWISS 8mm
3. PYROSWISS 10mm
4. PYROSWISS 12mm
5. PYROSWISS STADIP 66.2
6. PYROSWISS STADIP 64.2

### **PYROSWISS Range**

Products of the PYROSWISS range are monolithic fire-resistant glass panes made of tempered safety glass that provide integrity (E) for 30 to 60 minutes, and remain transparent in the event of a fire. PYROSWISS can symmetrically withstand high thermal stress caused by room fires due to its special production process.

## PERFORMANCE DATA

The range of PYROSWISS is large. A few examples of configurations for each of the products are described in this EPD.

Discover more information about the PYROSWISS range on [www.vetrotech.com](http://www.vetrotech.com).

In this Environmental Product Declaration, one square meter of 6 different glazing configurations will be analyzed:

|  | N° 1                     | N° 2                     | N° 3                      | N° 4                      | N° 5                             | N° 6                             |
|--|--------------------------|--------------------------|---------------------------|---------------------------|----------------------------------|----------------------------------|
|  | <b>PYROSWISS<br/>6mm</b> | <b>PYROSWISS<br/>8mm</b> | <b>PYROSWISS<br/>10mm</b> | <b>PYROSWISS<br/>12mm</b> | <b>PYROSWISS<br/>STADIP 66.2</b> | <b>PYROSWISS<br/>STADIP 64.2</b> |
| Details for this specific calculation                    | no coating               | no coating               | no coating                | no coating                | no coating                       | no coating                       |
| <b>Mechanical properties</b>                             |                          |                          |                           |                           |                                  |                                  |
| Nominal thickness (mm)                                   | 6                        | 8                        | 10                        | 12                        | 13                               | 11                               |
| Weight (kg/m <sup>2</sup> )                              | 15                       | 20                       | 25                        | 30                        | 31                               | 26                               |
| <b>Visible parameters</b>                                |                          |                          |                           |                           |                                  |                                  |
| Light transmittance (LT) %                               | 90                       | 89                       | 89                        | 88                        | 88                               | 88                               |
| Light reflection (RLe/RLi) (%)                           | 8 / 8                    | 8 / 8                    | 8 / 8                     | 8 / 8                     | 8 / 8                            | 8 / 8                            |
| <b>Thermal transmission</b>                              |                          |                          |                           |                           |                                  |                                  |
| Ug value   | 5,7                      | 5,6                      | 5,6                       | 5,5                       | 5,4                              | 5,4                              |
| <b>Thermal properties</b>                                |                          |                          |                           |                           |                                  |                                  |
| Energy transmittance (ET) %                              | 85                       | 83                       | 81                        | 79                        | 73                               | 74                               |
| Energy reflection (Ree/Rei) %                            | 8 / 8                    | 8 / 8                    | 7 / 7                     | 7 / 7                     | 7 / 7                            | 7 / 7                            |
| Solar factor g   | 0,87                     | 0,85                     | 0,84                      | 0,82                      | 0,77                             | 0,79                             |
| <b>Safety properties</b>                                 |                          |                          |                           |                           |                                  |                                  |
| Class EN 356 (protection against vandalism and burglary) | NPD                      | NPD                      | NPD                       | NPD                       | P2A                              | P2A                              |
| <b>Acoustics properties</b>                              |                          |                          |                           |                           |                                  |                                  |
| Rw(C;Ctr) (real test)                                    | 32 (-2; -2)              | 33 (-1; -2)              | 35 (-1; -2)               | 36 (-1; -2)               | 38 (-1; -3)                      | 37 (0; -2)                       |

The performance data are given according to the EN 410-2011 standard for thermal and visible parameters and following the EN 12758 for the acoustic data. Fire performance data is determined according to EN13823, EN1363-1, EN1363-2 and associated test standards. Fire classification is following EN15998, EN13501-1 and EN13501-2.

## Declaration of the main product components and/or materials



Toughened glass

Illustration shows a PYROSWISS made of toughened glass

|                | N° 1          | N° 2          | N° 3           | N° 4           | N° 5                  | N° 6                  |  |
|----------------|---------------|---------------|----------------|----------------|-----------------------|-----------------------|--|
|                | PYROSWISS 6mm | PYROSWISS 8mm | PYROSWISS 10mm | PYROSWISS 12mm | PYROSWISS STADIP 66.2 | PYROSWISS STADIP 64.2 |  |
|                | Weight (in %) | Weight (in %) | Weight (in %)  | Weight (in %)  | Weight (in %)         | Weight (in %)         | CAS Number                                     |
| Glass          | 100           | 100           | 100            | 100            | 97                    | 97                    | CAS number 65997-17-3, EINECS number 266-046-0 |
| PVB interlayer | no PVB        | no PVB        | no PVB         | no PVB         | 2,7                   | 3,2                   | Polymer  |

The above list gives the main components of the product, including those contributing to more than 5% of any environmental impact, if any. The percentages are given for the glass make-ups mentioned in this EPD; the % may vary depending on the glazing configuration.


## LCA calculation information

|  |   |
|--|---|
| <b>FUNCTIONAL UNIT / DECLARED UNIT</b>       | One square meter of PYROSWISS to be incorporated into a building. The impacts of installation are not taken into account.   |
| <b>SYSTEM BOUNDARIES</b>                     | Cradle to gate.<br>Mandatory Stages = A1-A3   |
| <b>EXCLUDED LIFE CYCLE STAGES</b>            | Excluded stages = A4-A5; B1-B7; C1-C4<br>Optional stage = D   |
| <b>REFERENCE SERVICE LIFE (RSL)</b>          | n/a. Boundaries are cradle to gate  |
| <b>CUT-OFF RULES</b>                         | <p>All significant parameters shall be included. According to EN 15804, mass flows under 1% of the total mass input and/or energy flows representing less than 1% of the total primary energy usage of the associated unit process may be omitted. However, the total amount of energy and mass omitted must not exceed 5% per module.</p> <p>Substances of Very High Concern (SVHC), as defined in the REACH Regulation (article 57), in a concentration above 0.1% by weight, in glass final products, shall be included in the Life Cycle Inventory and the cut-off rules shall not apply.</p> <p>All inputs and outputs to the processes for which data is available were included in the calculation. No core processes were excluded. Particular care was taken to include materials and energy flows known to have the potential to cause significant emissions into air, water and soil related to the environmental indicators of the governing PCR.</p> |
| <b>ALLOCATIONS</b>                           | <p>No allocation. Attribution of total inputs and outputs are based on m<sup>2</sup> of production for Pyroswiss.</p> <p>Allocation of background data (energy and materials) taken from the GaBi 2016 databases is documented online at <a href="http://www.gabi-software.com/support/gabi/">http://www.gabi-software.com/support/gabi/</a></p>  |
| <b>GEOGRAPHICAL COVERAGE AND TIME PERIOD</b> | <p>Primary production data is from the year 2014 VETROTECH SAINT-GOBAIN France.</p> <p>The shares of the different production sites are from 2019.</p>  |
| <b>BACKGROUND DATA SOURCE</b>                | GaBi data not older than 10 years were used to evaluate the environmental impacts.  |
| <b>SOFTWARE</b>                              | <p>Gabi 8 - GaBi envision</p> <p>The glass LCA model is based on an interactive GaBi tool which was verified separately in 2016. SGG_EPD tool for Building glass 1m2_2016-11-23.gmbx</p> <p>Initial tool was updated with most recent version data base (GaBi 8 service pack 36)</p>  |

Reading note: In this document, the thousand separator and the decimal mark follow the International System; English version, *i.e* 1 234.56

# Life cycle stages

## Diagram of the Life Cycle

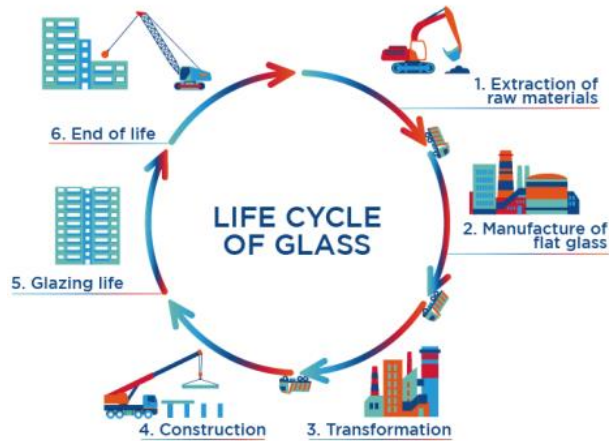

Relevant stages: as this is a cradle to gate the only relevant stages are A1-A3.

In conformity with EN 15804+A1, production step includes:

- Extraction and processing of raw materials;
- Generation of electricity, steam and heat from primary energy resources, also including their extraction, refining and transport;
- Transportation up to the factory gate and internal transport;
- Manufacturing of ancillary materials or pre-products;
- Manufacturing of product;
- Processing up to the end-of-waste state or disposal of final residues including any packaging not leaving the factory gate with the product.

All glasses are transported in specific trucks (inloaders), with returnable racks. Other components, like intumescent layer are delivered in drums, which are return to the supplier.

A description of the relevant stages is given in the figures below, two types of PYROSWISS configurations are given in the Figure 1 and Figure 2.

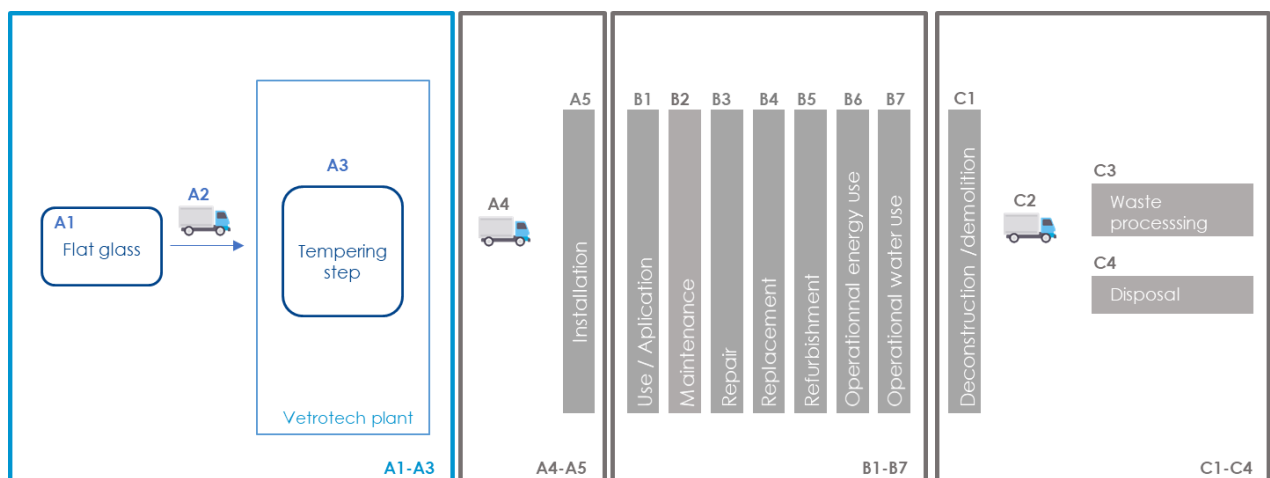


Figure 1 : Relevant LCA steps for PYROSWISS Steps in blue are declared in this EPD, steps in grey are not declared.



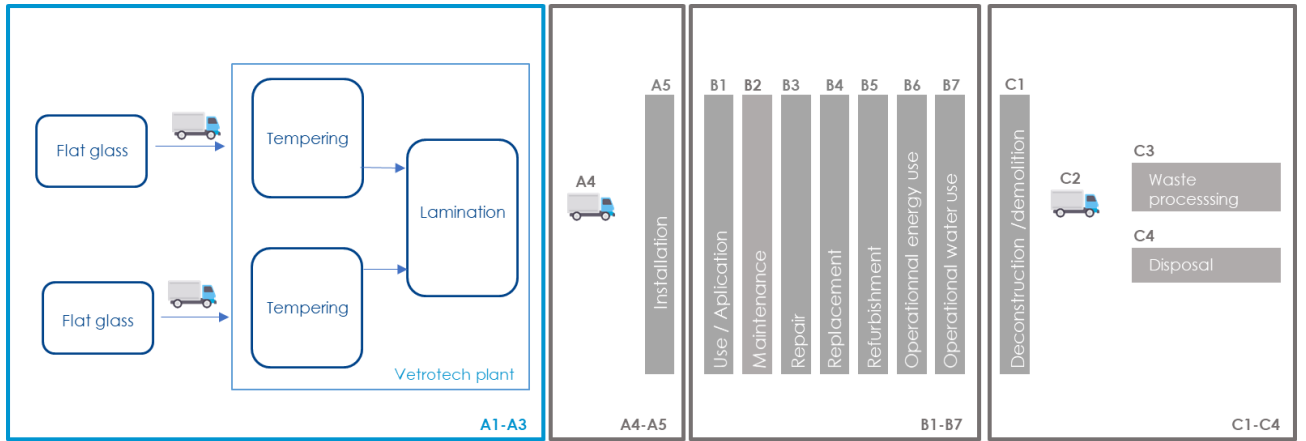


Figure 2 : Relevant LCA steps for PYROSWISS with lamination. Steps in blue are declared in this EPD, steps in grey are not declared.

| Production   |                           |               | Installation               |                            | Use phase         |             |        |             |               |                         |                       | End-of-Life                 |                  |   |          | Next product system                    |
|--|---------------------------|---------------|----------------------------|----------------------------|-------------------|-------------|--------|-------------|---------------|-------------------------|-----------------------|-----------------------------|------------------|---|----------|--|
| A1   | A2                        | A3            | A4                         | A5                         | B1                | B2          | B3     | B4          | B5            | B6                      | B7                    | C1                          | C3               | C3  | C4       | D                                      |
| Raw materials (extraction, processing, recycled material)premières | Transport to manufacturer | Manufacturing | Transport to building site | Installation into building | Use / application | Maintenance | Repair | Replacement | Refurbishment | Operational; energy use | Operational water use | Deconstruction / demolition | Transport to EoL | Waste processing for reuse, recovery or recycling | Disposal | Reuse, recovery or recycling potential |
| X  | X                         | X             | MNA                        | MNA                        | MNA               | MNA         | MNA    | MNA         | MNA           | MNA                     | MNA                   | MNA                         | MNA              | MNA   | MNA      | MNA                                    |

Table 1: Modules of the production life cycle included in the EPD (X = declared modules ; MNA = modules not assessed)

## Product stage, A1-A3


Description of the stage: A1 to A3 represent the production of a PYROSWISS glass unit in the VETROTECH plant, based on the use of special, processed flat glass SGG PLANICLEAR or laminated glass SGG STADIP on the basis of special, processed flat glass with the transportation to the processing site.

The product stage includes the extraction and processing of raw materials and energies, transport to the manufacturer, manufacturing and processing of PYROSWISS glazing.

Flat glass is a sheet of soda-lime glass made by floating molten glass on a bed of molten tin. This method gives the sheet uniform thickness and very flat surfaces.

Laminated glass is an assembly of two flat glasses and a PVB foil. To ensure the good adhesion between the glass and the film, the assembly is manufactured in an autoclave (at high pressure and temperature).

### *PYROSWISS manufacturing process flow diagram*

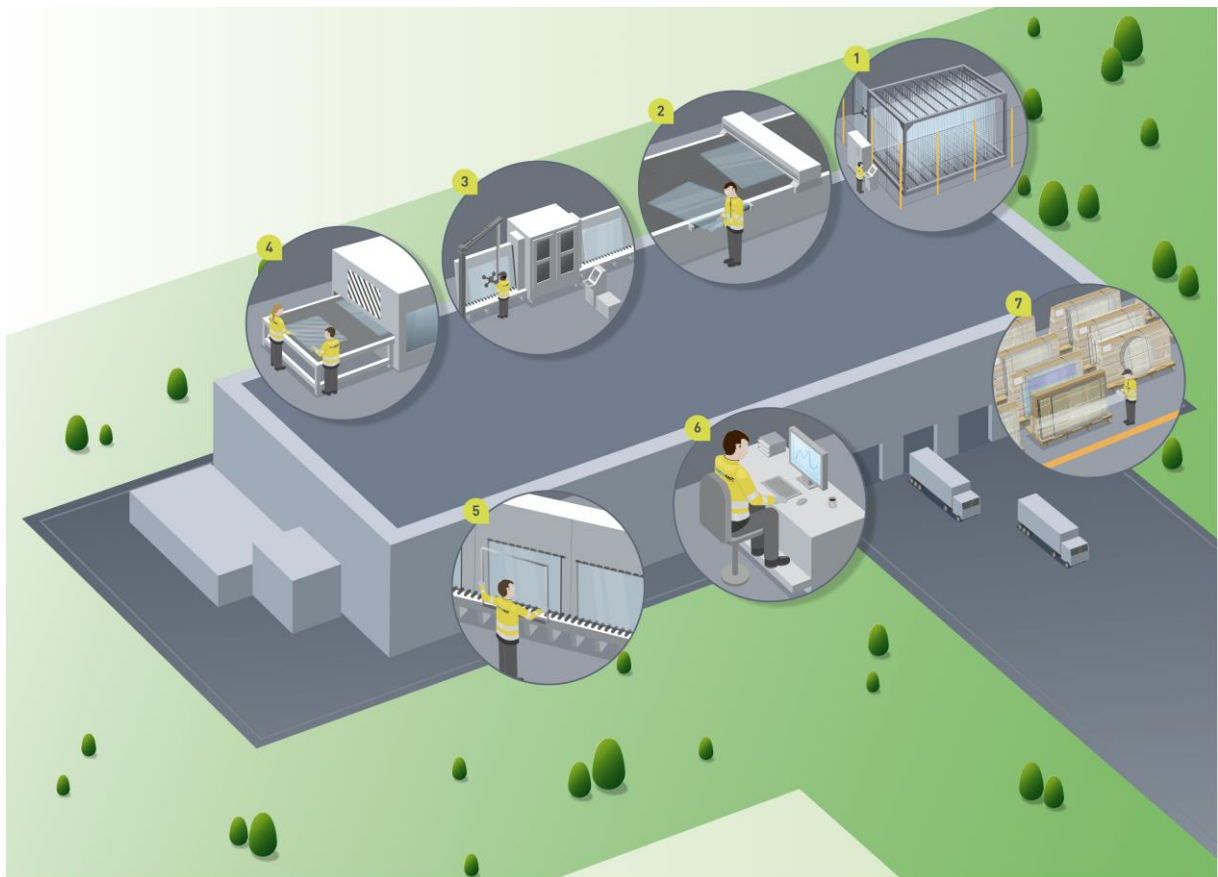

1. **RECEPTION AND STORAGE:** Sheets of glass arrive from float glass plants by special trucks (inloaders) and are stored in our plants.
2. **CUTTING:** The right sheet of glass is automatically taken from the glass storage and cut-to-size according the customer's requirements (cut to order).
3. **EDGE TREATMENT:** Glass edges are treated to the specific profile and polished in order to satisfy the prescribed quality and prepare the next processing step.
4. **TEMPERING:** All glasses are tempered to a high level to ensure the overall performance in terms of fire resistance. Break resistance and accidental impact safety aspects are also granted.
5. **POST PROCESSING (optional):** PYROSWISS glass can then be combined into many different make-ups in order to bring multifunctionality to our ready to install glazing unit.
6. **QUALITY CONTROL:** All glass units are inspected and checked to regulatory requirements and

quality standards before being packed on stillages. That gives us the possibility to meet the customer needs.








7. **STORAGE AND TRANSPORT:** All glass units are packed on stillages and dispatched to the final place of application.

Use of sustainable light bulbs, recycling of broken glass cullets, recycling of cardboard, metal, timber and installation of pollution abatement systems and closed circuit management of water: every measure is taken to limit the consumption of energy, extraction of natural resources, production of waste and emissions into the atmosphere.









## LCA results

The table below present the environmental impacts associated with the production of one square meter of PYROSWISS. This is a Cradle-to-Gate EPD. The environmental impacts of all the other stages in the life cycle of PYROSWISS are not declared (INA).




ENVIRONMENTAL IMPACTS PYROSWISS 6 mm

| Parameters   | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse. recovery. recycling |
|--|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|  | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  <b>Global Warming Potential (GWP) - kg CO<sub>2</sub> equiv/FU</b>  | 2.34E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas (carbon dioxide) which is assigned a value of 1.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Ozone Depletion (ODP) kg CFC 11 equiv/FU</b>   | 3.28E-10      | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules. |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Acidification potential (AP) kg SO<sub>2</sub> equiv/FU</b>  | 1.12E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Acid depositions have negative impacts on natural ecosystems and the man-made environment incl. buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Eutrophication potential (EP) kg (PO<sub>4</sub>)<sup>3-</sup> equiv/FU</b>  | 3.29E-2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Excessive enrichment of waters and continental surfaces with nutrients and the associated adverse biological effects.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Photochemical ozone creation potential (POPC) kg Ethene equiv/FU</b>   | 6.62E-3       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU</b>   | 1.55E-4       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  <b>Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU</b>  | 2.79E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Consumption of non-renewable resources, thereby lowering their availability for future generations.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |





RESOURCE USE PYROSWISS 6 mm

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU | 8.15E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU   | 8.15E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw           | 7.26E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU   | 7.26E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of secondary material kg/FU  | 1.72          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable secondary fuels- MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable secondary fuels - MJ/FU   | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of net fresh water - m³/FU   | 2.54E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |

WASTE CATEGORIES PYROSWISS 6 mm








| Parameters   | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|--|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|  | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Hazardous waste disposed <i>kg/FU</i>                       | 9.15E-7       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Non-hazardous (excluding inert) waste disposed <i>kg/FU</i> | 7.06E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Radioactive waste disposed <i>kg/FU</i>                     | 1.76E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |

OUTPUT FLOWS PYROSWISS 6 mm









| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Components for re-use <i>kg/FU</i>                       | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for recycling <i>kg/FU</i>                     | 4.78E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for energy recovery <i>kg/FU</i>               | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Exported energy, detailed by energy carrier <i>MJ/FU</i> | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |






ENVIRONMENTAL IMPACTS PYROSWISS 8 mm

| Parameters   | Product stage  | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|--|--|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|  | A1 / A2 / A3   | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  <b>Global Warming Potential (GWP) - kg CO<sub>2</sub> equiv/FU</b>                            | 3.01E+1  | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  | The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas (carbon dioxide) which is assigned a value of 1.  |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Ozone Depletion (ODP) kg CFC 11 equiv/FU</b>   | 3.46E-10   | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  | Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules. |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Acidification potential (AP) kg SO<sub>2</sub> equiv/FU</b>                                | 1.45E-1  | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  | Acid depositions have negative impacts on natural ecosystems and the man-made environment incl. buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.  |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Eutrophication potential (EP) kg (PO<sub>4</sub>)<sup>3-</sup> equiv/FU</b>                | 4.34E-2  | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  | Excessive enrichment of waters and continental surfaces with nutrients and the associated adverse biological effects.  |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Photochemical ozone creation potential (POPC) kg Ethene equiv/FU</b>                     | 8.58E-3  | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  | Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.  |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU</b> | 2.04E-4  | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  |  |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU</b>          | 3.59E+2  | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  | Consumption of non-renewable resources, thereby lowering their availability for future generations.  |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |





RESOURCE USE PYROSWISS 8 mm

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU | 8.55E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU   | 8.55E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw           | 8.09E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU   | 8.09E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of secondary material kg/FU  | 2.29          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable secondary fuels- MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable secondary fuels - MJ/FU   | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of net fresh water - m³/FU   | 2.72E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |








WASTE CATEGORIES PYROSWISS 8 mm

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Hazardous waste disposed kg/FU                       | 1.09E-6       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Non-hazardous (excluding inert) waste disposed kg/FU | 8.73E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Radioactive waste disposed kg/FU                     | 1.77E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |









OUTPUT FLOWS PYROSWISS 8 mm

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Components for re-use <i>kg/FU</i>                       | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for recycling <i>kg/FU</i>                     | 6.38E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for energy recovery <i>kg/FU</i>               | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Exported energy, detailed by energy carrier <i>MJ/FU</i> | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |




ENVIRONMENTAL IMPACTS PYROSWISS 10 mm

| Parameters   | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|--|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|  | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  <b>Global Warming Potential (GWP) - kg CO<sub>2</sub> equiv/FU</b>  | 3.68E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas (carbon dioxide) which is assigned a value of 1.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Ozone Depletion (ODP) kg CFC 11 equiv/FU</b>   | 3.64E-10      | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules. |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Acidification potential (AP) kg SO<sub>2</sub> equiv/FU</b>  | 1.79E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Acid depositions have negative impacts on natural ecosystems and the man-made environment incl. buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Eutrophication potential (EP) kg (PO<sub>4</sub>)<sup>3-</sup> equiv/FU</b>  | 5.38E-2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Excessive enrichment of waters and continental surfaces with nutrients and the associated adverse biological effects.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Photochemical ozone creation potential (POPC) kg Ethene equiv/FU</b>   | 1.05E-2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU</b>   | 2.54E-4       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  <b>Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU</b>  | 4.39E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Consumption of non-renewable resources, thereby lowering their availability for future generations.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |





RESOURCE USE PYROSWISS 10 mm

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU | 8.94E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU   | 8.94E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw           | 8.91E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU   | 9.91E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of secondary material kg/FU  | 2.87          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable secondary fuels- MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable secondary fuels - MJ/FU   | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of net fresh water - m³/FU   | 2.90E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |

WASTE CATEGORIES PYROSWISS 10 mm








| Parameters   | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|--|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|  | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Hazardous waste disposed <i>kg/FU</i>                       | 1.27E-6       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Non-hazardous (excluding inert) waste disposed <i>kg/FU</i> | 1.04          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Radioactive waste disposed <i>kg/FU</i>                     | 1.78E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |

OUTPUT FLOWS PYROSWISS 10 mm









| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Components for re-use <i>kg/FU</i>                       | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for recycling <i>kg/FU</i>                     | 7.97E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for energy recovery <i>kg/FU</i>               | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Exported energy, detailed by energy carrier <i>MJ/FU</i> | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |






ENVIRONMENTAL IMPACTS PYROSWISS 12 mm

| Parameters   | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|--|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|  | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  <b>Global Warming Potential (GWP) - kg CO<sub>2</sub> equiv/FU</b>  | 4.34E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas (carbon dioxide) which is assigned a value of 1.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Ozone Depletion (ODP) kg CFC 11 equiv/FU</b>   | 3.82E-10      | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules. |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Acidification potential (AP) kg SO<sub>2</sub> equiv/FU</b>  | 2.12E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Acid depositions have negative impacts on natural ecosystems and the man-made environment incl. buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Eutrophication potential (EP) kg (PO<sub>4</sub>)<sup>3-</sup> equiv/FU</b>  | 6.43E-2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Excessive enrichment of waters and continental surfaces with nutrients and the associated adverse biological effects.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Photochemical ozone creation potential (POPC) kg Ethene equiv/FU</b>   | 1.25E-2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU</b>   | 3.04E-4       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  <b>Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU</b>  | 5.19E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Consumption of non-renewable resources, thereby lowering their availability for future generations.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |





RESOURCE USE PYROSWISS 12 mm

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU | 9.34E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU   | 9.34E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy excluding non-renewable primary energy resources used as raw           | 9.74E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU   | 9.74E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of secondary material kg/FU  | 3.44          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable secondary fuels- MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable secondary fuels - MJ/FU   | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of net fresh water - m³/FU   | 3.07E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |








WASTE CATEGORIES PYROSWISS 12 mm

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Hazardous waste disposed kg/FU                       | 1.44E-6       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Non-hazardous (excluding inert) waste disposed kg/FU | 1.21          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Radioactive waste disposed kg/FU                     | 1.79E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |









OUTPUT FLOWS PYROSWISS 12 mm

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Components for re-use <i>kg/FU</i>                       | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for recycling <i>kg/FU</i>                     | 9.57E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for energy recovery <i>kg/FU</i>               | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Exported energy, detailed by energy carrier <i>MJ/FU</i> | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |




ENVIRONMENTAL IMPACTS PYROSWISS STADIP 66.2

| Parameters   | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|--|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|  | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  <b>Global Warming Potential (GWP) - kg CO<sub>2</sub> equiv/FU</b>  | 5.33E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas (carbon dioxide) which is assigned a value of 1.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Ozone Depletion (ODP) kg CFC 11 equiv/FU</b>   | 2.7E-9        | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules. |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Acidification potential (AP) kg SO<sub>2</sub> equiv/FU</b>  | 2.31E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Acid depositions have negative impacts on natural ecosystems and the man-made environment incl. buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Eutrophication potential (EP) kg (PO<sub>4</sub>)<sup>3-</sup> equiv/FU</b>  | 6.75E-2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Excessive enrichment of waters and continental surfaces with nutrients and the associated adverse biological effects.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Photochemical ozone creation potential (POPC) kg Ethene equiv/FU</b>   | 1.45E-2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU</b>   | 3.12E-4       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  <b>Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU</b>  | 6.68E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Consumption of non-renewable resources, thereby lowering their availability for future generations.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |





RESOURCE USE PYROSWISS STADIP 66.2

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU | 1.78E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU   | 1.78E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy excluding non-renewable primary energy resources used as               | 1.60E+3       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU   | 1.60E+3       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of secondary material kg/FU  | 3.44          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable secondary fuels- MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable secondary fuels - MJ/FU   | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of net fresh water - m <sup>3</sup> /FU  | 5.61E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |

WASTE CATEGORIES PYROSWISS STADIP 66.2








| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Hazardous waste disposed kg/FU                       | 1.89E-6       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Non-hazardous (excluding inert) waste disposed kg/FU | 1.5           | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Radioactive waste disposed kg/FU                     | 3.68E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |

OUTPUT FLOWS PYROSWISS STADIP 66.2









| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Components for re-use <i>kg/FU</i>                       | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for recycling <i>kg/FU</i>                     | 1.76          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for energy recovery <i>kg/FU</i>               | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Exported energy, detailed by energy carrier <i>MJ/FU</i> | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |






**ENVIRONMENTAL IMPACTS PYROSWISS STADIP 64.2**

| Parameters   | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|--|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|  | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  <b>Global Warming Potential (GWP) - kg CO<sub>2</sub> equiv/FU</b>  | 4.57E+1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| The global warming potential of a gas refers to the total contribution to global warming resulting from the emission of one unit of that gas relative to one unit of the reference gas (carbon dioxide) which is assigned a value of 1.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Ozone Depletion (ODP) kg CFC 11 equiv/FU</b>   | 2.45E-9       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Destruction of the stratospheric ozone layer which shields the earth from ultraviolet radiation harmful to life. This destruction of ozone is caused by the breakdown of certain chlorine and/or bromine containing compounds (chlorofluorocarbons or halons), which break down when they reach the stratosphere and then catalytically destroy ozone molecules. |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Acidification potential (AP) kg SO<sub>2</sub> equiv/FU</b>  | 1.9E-1        | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Acid depositions have negative impacts on natural ecosystems and the man-made environment incl. buildings. The main sources for emissions of acidifying substances are agriculture and fossil fuel combustion used for electricity production, heating and transport.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Eutrophication potential (EP) kg (PO<sub>4</sub>)<sup>3-</sup> equiv/FU</b>  | 5.75E-2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Excessive enrichment of waters and continental surfaces with nutrients and the associated adverse biological effects.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Photochemical ozone creation potential (POPC) kg Ethene equiv/FU</b>   | 1.24E-2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Chemical reactions brought about by the light energy of the sun. The reaction of nitrogen oxides with hydrocarbons in the presence of sunlight to form ozone is an example of a photochemical reaction.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |
|  <b>Abiotic depletion potential for non-fossil resources (ADP-elements) - kg Sb equiv/FU</b>   | 2.57E-4       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  <b>Abiotic depletion potential for fossil resources (ADP-fossil fuels) - MJ/FU</b>  | 5.61E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Consumption of non-renewable resources, thereby lowering their availability for future generations.  |               |                            |                 |           |                |           |                |                  |                           |                          |                                |              |                     |             |                              |





RESOURCE USE PYROSWISS STADIP 64.2

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Use of renewable primary energy excluding renewable primary energy resources used as raw materials - MJ/FU | 1.15E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of renewable primary energy resources (primary energy and primary energy resources used as raw materials) MJ/FU   | 1.15E+2       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy excluding non-renewable primary energy resources used as               | 1.12E+3       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable primary energy used as raw materials MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
| Total use of non-renewable primary energy resources (primary energy and primary energy resources used as raw materials) - MJ/FU   | 1.12E+3       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of secondary material kg/FU  | 2.87          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of renewable secondary fuels- MJ/FU  | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of non-renewable secondary fuels - MJ/FU   | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Use of net fresh water - m <sup>3</sup> /FU  | 4.05E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |

WASTE CATEGORIES PYROSWISS STADIP 64.2

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Hazardous waste disposed kg/FU                       | 1.67E-6       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Non-hazardous (excluding inert) waste disposed kg/FU | 2.42          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Radioactive waste disposed kg/FU                     | 2.21E-1       | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |

OUTPUT FLOWS PYROSWISS STADIP 64.2

| Parameters  | Product stage | Construction process stage |                 | Use stage |                |           |                |                  |                           |                          | End-of-life stage              |              |                     |             | D Reuse, recovery, recycling |
|---|---------------|----------------------------|-----------------|-----------|----------------|-----------|----------------|------------------|---------------------------|--------------------------|--------------------------------|--------------|---------------------|-------------|------------------------------|
|   | A1 / A2 / A3  | A4 Transport               | A5 Installation | B1 Use    | B2 Maintenance | B3 Repair | B4 Replacement | B5 Refurbishment | B6 Operational energy use | B7 Operational water use | C1 Deconstruction / demolition | C2 Transport | C3 Waste processing | C4 Disposal |                              |
|  Components for re-use <i>kg/FU</i>                       | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for recycling <i>kg/FU</i>                     | 1.60          | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Materials for energy recovery <i>kg/FU</i>               | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |
|  Exported energy, detailed by energy carrier <i>MJ/FU</i> | 0             | INA                        | INA             | INA       | INA            | INA       | INA            | INA              | INA                       | INA                      | INA                            | INA          | INA                 | INA         | INA                          |






## LCA results interpretation

In the production of PYROSWISS 6 mm, most of the impacts are linked to the tempering process.

PYROSWISS is made of special, processed tempered glass.

Most of the CO<sub>2</sub> emissions are linked to the glass production phase.

Water consumption is linked to the electrical energy used for the transformation process of the glass and the tempering process.

|  |  | Environnemental impacts<br>(A1-A3)<br>PYROSWISS 6mm | Unit                        |
|--|--|---|-----------------------------|
|   | Global warming                                     | 2.34E+1   | kg CO <sub>2</sub> equiv/FU |
|   | Non-Renewable resources consumption <sup>[1]</sup> | 2.79E+2   | MJ/FU                       |
|   | Energy consumption <sup>[2]</sup>                  | 8.08E+2   | MJ/FU                       |
|   | Water consumption <sup>[3]</sup>                   | 2.54E-1   | m <sup>3</sup> /FU          |
|  | Waste production <sup>[4]</sup>                    | 8.82E-1   | kg/FU                       |

<sup>[1]</sup>: This indicator corresponds to the abiotic depletion potential of fossil resources.

<sup>[2]</sup>: This indicator corresponds to the total use of primary energy (renewable and non-renewable)

<sup>[3]</sup>: This indicator corresponds to the use of fresh net water.

<sup>[4]</sup>: This indicator corresponds to the sum of hazardous, non-hazardous and radioactive waste disposed.

## Health characteristics

### Indoor air quality

Clear flat glass is an inert material that doesn't release any inorganic & organic compounds - in particular, no VOC (volatile organic compounds).

If the glass is laminated, a PVB layer is included in the glazing. The VOC emissions test (following ISO 16000 standard) rank the PVB A+ (highest rank) following the French regulation (Eurofins report G10504).

- Total VOC after 28 days < 200 µg/m<sup>3</sup>
- Formaldehyde after 28 days < 10 µg/m<sup>3</sup>

## Additional Environmental Information

### Disposal considerations






Disposal may be in accordance with local and national legal requirements for the disposal of glass waste. The local regulations for discharging waste water in sewage treatment plants must be taken into consideration for water-soluble material. In the EU, waste code 200102<sup>1</sup> is applied (Test report 66988008 Eurofins).

### Saint-Gobain's environmental policy

Saint-Gobain's environmental vision is to ensure the sustainable development of its activities, while preserving the environment from the impacts of its processes and services throughout their life cycle. The Group thus seeks to ensure the preservation of resources, meet the expectations of its relevant stakeholders, and offer its customers the highest added value with the lowest environmental impact.

The Group has set two long-term objectives: zero environmental accidents and a minimum impact of its activities on the environment. Short and medium-term goals are set to address these two ambitions. They concern five environmental areas identified by the Group: raw materials and waste; energy, atmospheric emissions and climate; water; biodiversity; and environmental accidents and nuisance.

#### Saint-Gobain's long term objectives:

|   |   |
|---|---|
|   | Non recovered waste (2010-2025): -50%<br>Long-term: zero non-recovered waste  |
|  | Energy consumption: -15% (2010-2025)<br>CO <sub>2</sub> emissions: -20% (2010-2025)<br>Emissions of NOx, SO <sub>2</sub> and dust: -20% for each emissions category (2010-2025) |
|  | Water discharge: -80% (2010-2025)<br>Long-term: zero industrial water discharge in liquid form  |
|  | 2025: promote the preservation of natural areas at Company sites as much as possible  |
|  | 2025: all environmental events are recorded, registered and investigated  |

More information on our website: [www.saint-gobain.com](http://www.saint-gobain.com) and our Registration Document.

### Our products' contribution to Sustainable Buildings

Saint-Gobain encourages sustainable construction and develops innovative solutions for new and renovated buildings that are energy efficient, comfortable, healthy and esthetically superior, while at the same time protecting natural resources.

The following information might be of help for green building certification programs:

#### RECYCLED CONTENT

*(Required for LEED v4 Building product disclosure and optimization - sourcing of raw materials)*

<sup>1</sup> EWC code 200102 – glass – Absolute Non-hazardous

Recycled content: proportion (by mass) of recycled material in a product or packaging. Only pre-consumer and post-consumer materials shall be considered as recycled content.

- Post-consumer material: material generated by households or commercial, industrial and institutional facilities in their role as end-users of the product which can no longer be used for its intended purpose.
- In practice, in the case of flat glass, all material coming from glass recycling collection schemes falls under this category, i.e. glass waste from end-of-life vehicles, construction and demolition waste, etc.
- Pre-consumer material: material diverted from the waste stream during a manufacturing process. Excluded is reutilization of materials such as rework, regrind, or scrap generated in a process and capable of being reclaimed within the same process that generated it.
- In the case of flat glass, this waste originates from the processing or re-processing of glass that takes place before the final product reaches the consumer market. Pre-consumer waste flat glass is made of cut-off, losses during laminating, bending and other processing, including the manufacture of insulating glass units or automotive windscreens.

Cullet generated in the furnace plant and which is reintroduced into the furnace cannot be considered as pre-consumer recycled content, since there was never intent to discard it and therefore it would never have entered the solid waste stream.

|                             |      |
|-----------------------------|------|
| <b>Pre-consumer cullet</b>  | ~7%  |
| <b>Post-consumer cullet</b> | < 1% |

In the future, Saint-Gobain Glass intends to continue the increase of recycled material in its products, especially when recycling building post-consumer cullet glass dismantling and recycling networks will be available in every country.

## References

- EN 15804 + A1(2013)** – Sustainability of construction works – Environmental product declarations – Core rules for the product category of construction product.
- PCR 2012:01** Construction products and construction services, version 2.3 2018-11-15
- GPI 3.0** - GENERAL PROGRAMME INSTRUCTIONS FOR THE INTERNATIONAL EPD® SYSTEM
- EN 410** - Glass in building - Determination of luminous and solar characteristics of glazing
- EN 1363-1** - Fire resistance tests - Part 1: General Requirements
- EN 1363-2** - Fire resistance tests - Part 2: Alternative and additional procedures
- EN 12758** - Glazing and airborne sound insulation - Product descriptions and determination of properties
- EN 13501-1** - Fire classification of construction products and building elements - Part 1: Classification using data from reaction to fire tests
- EN 13501-2** - Fire classification of construction products and building elements - Part 2: Classification using data from fire resistance tests, excluding ventilation services
- EN 13823** - Reaction to fire tests for building products - Building products excluding floorings exposed to the thermal attack by a single burning item
- EN 14449** - Glass in building - Laminated glass and laminated safety glass - Evaluation of conformity/Product standard
- EN 15998** - Glass in building - Safety in case of fire, fire resistance - Glass testing methodology for the purpose of classification